

# Health and Economic Profits from Riverbank Filtration in India

Pamela Cady<sup>1</sup>, Dr. Tom Boving<sup>1</sup>, Dr. B.S. Choudri<sup>2</sup>, Kavita Patil<sup>3</sup>, Veerabasawant Reddy<sup>3</sup>

<sup>1</sup>Department of Geosciences, University of Rhode Island, Kingston, RI 02881 USA

<sup>2</sup>Centre for Environmental Studies & Research P.O. Box 17, Sultan Qaboos University, Al-Khod, PC 123 Sultanate of Oman

<sup>3</sup>The Energy and Resources Institute, Western Regional Centre, Alto-St. Cruz, Goa, 403 202 India

## Introduction

This project investigates a small Riverbank Filtration (RBF) system in the tropical monsoon climate of rural western India. As in much of India, the residents of the village of Kariyampalli do not have reliable access to safe drinking water and face problems with contaminated surface water and with the potential for groundwater depletion. RBF addresses both issues of polluted surface water supplies (Schmidt et al., 2003; Boving et al., 2010) and the overuse of groundwater, a worldwide problem with recent data showing severe examples in northern India (Rodell et al., 2009).

## Objective


Dissolved silica (Hooper and Shoemaker, 1986) and stable isotope (Sklash and Farvolden, 1979) levels are examined to determine the percentage of bacterial and metal contaminant removal that can be attributed to groundwater dilution versus other RBF processes.

## Riverbank Filtration (RBF)

In Riverbank Filtration a shallow well is drilled near a surface water source to improve the water quality by drawing river water through the aquifer material.




Figure 1: Riverbank Filtration (RBF) cross-sectional view shows path of infiltrating river water to the production well (Kim et al., 2003)

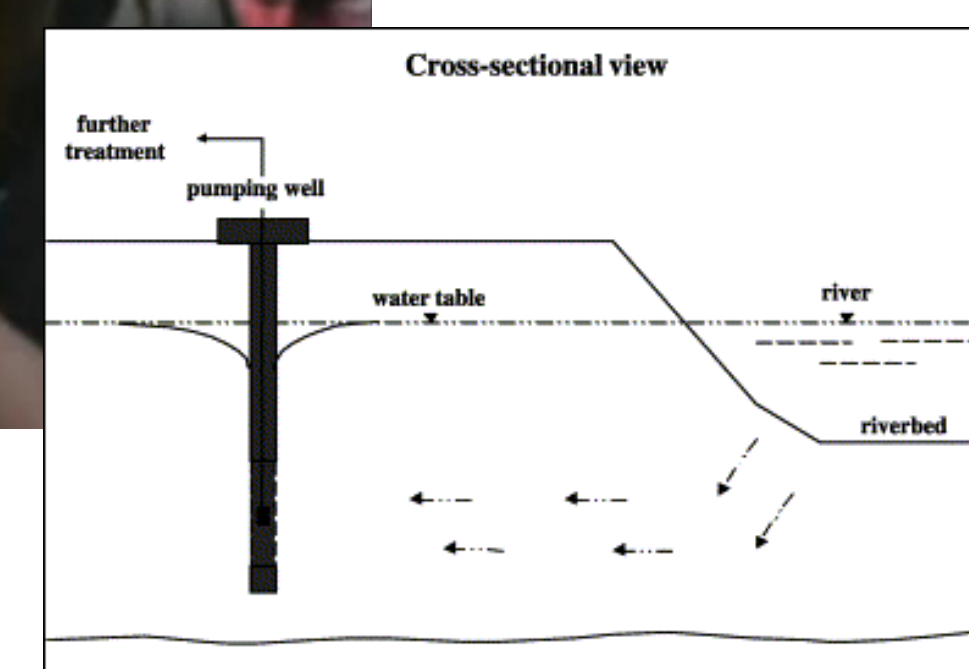

Additionally, the project is set up so that local villagers will take over management and upkeep of the well. Local water users fees are used for this maintenance. The allocation of any profits from the sale of the water are to be voted on by locally elected board members.

## Field Site

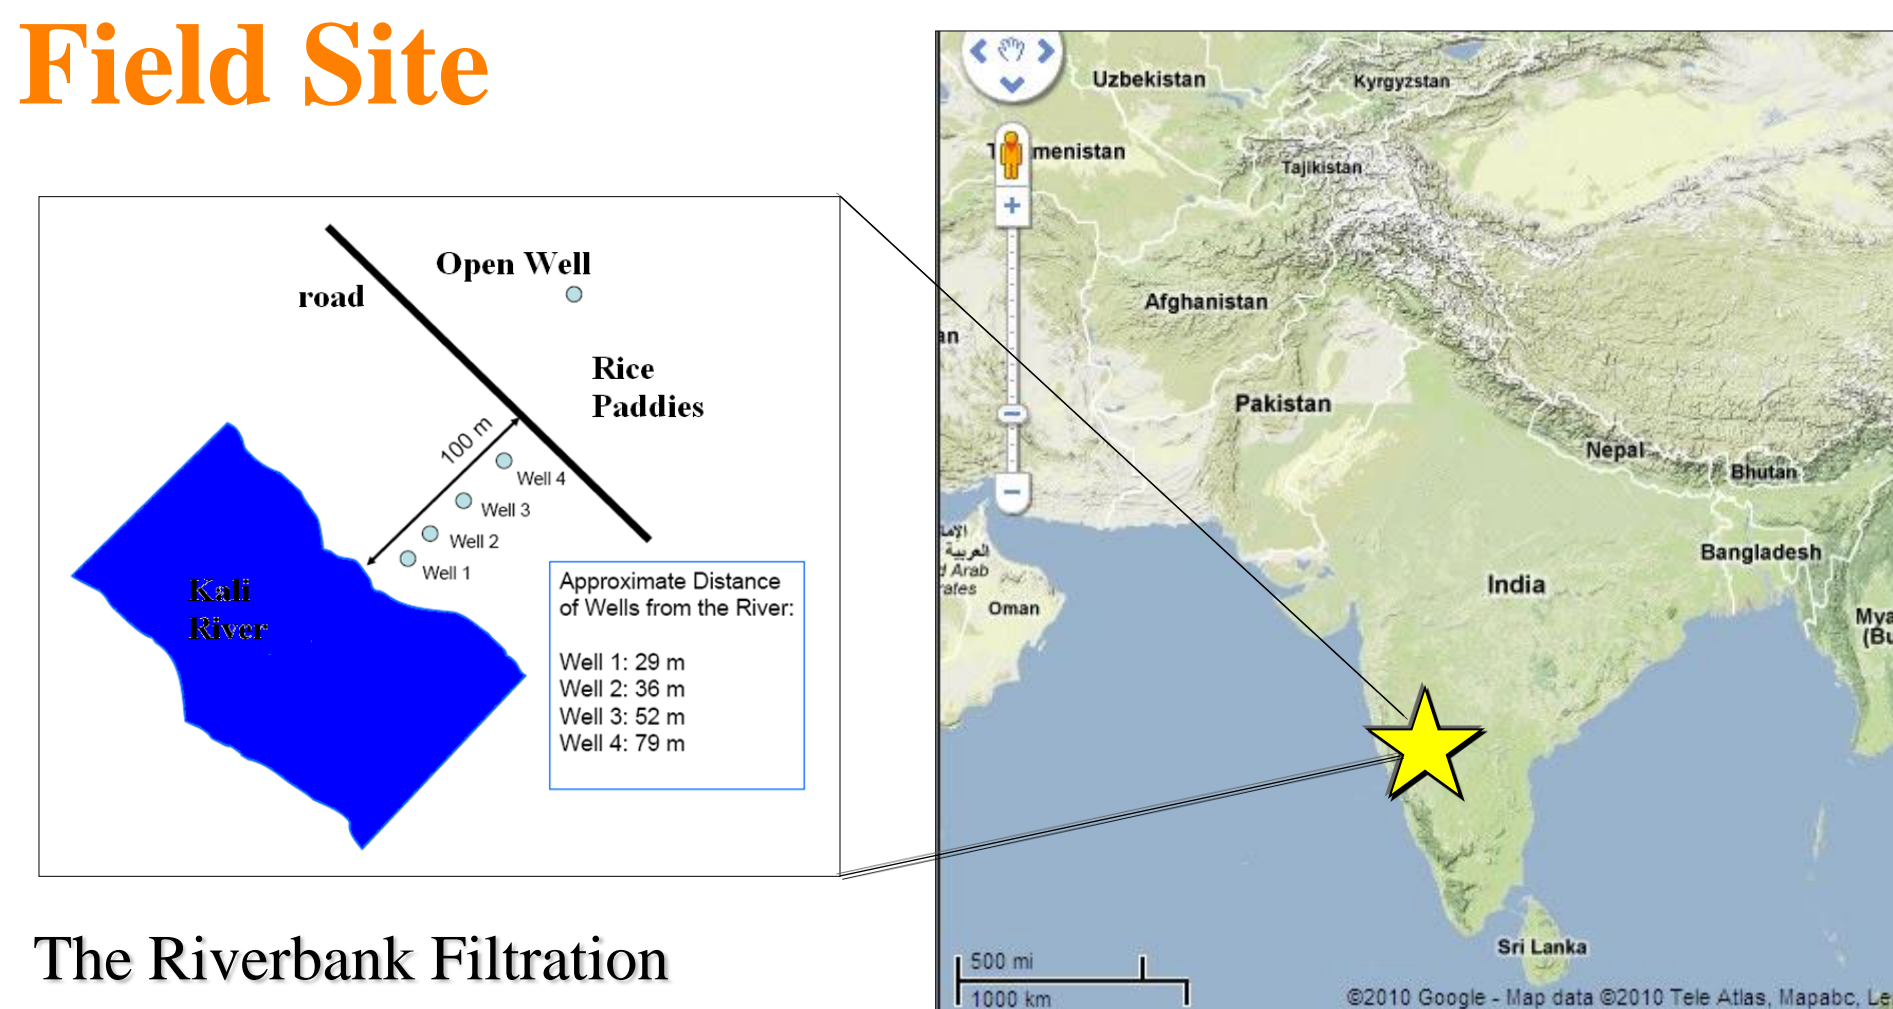

The Riverbank Filtration research site is located in India's Western Ghats

Source: maps.google.com

## Materials and Methods

- Stable isotopes: isotope-ratio mass spectrometer
- Dissolved silica: UV-vis spectrophotometer
- Metals: Inductively Coupled Plasma Mass Spectrometer (ICPMS)
- Bacteria: IDEXX Most Probable Number (MPN) enumeration technique

## Isotope Data

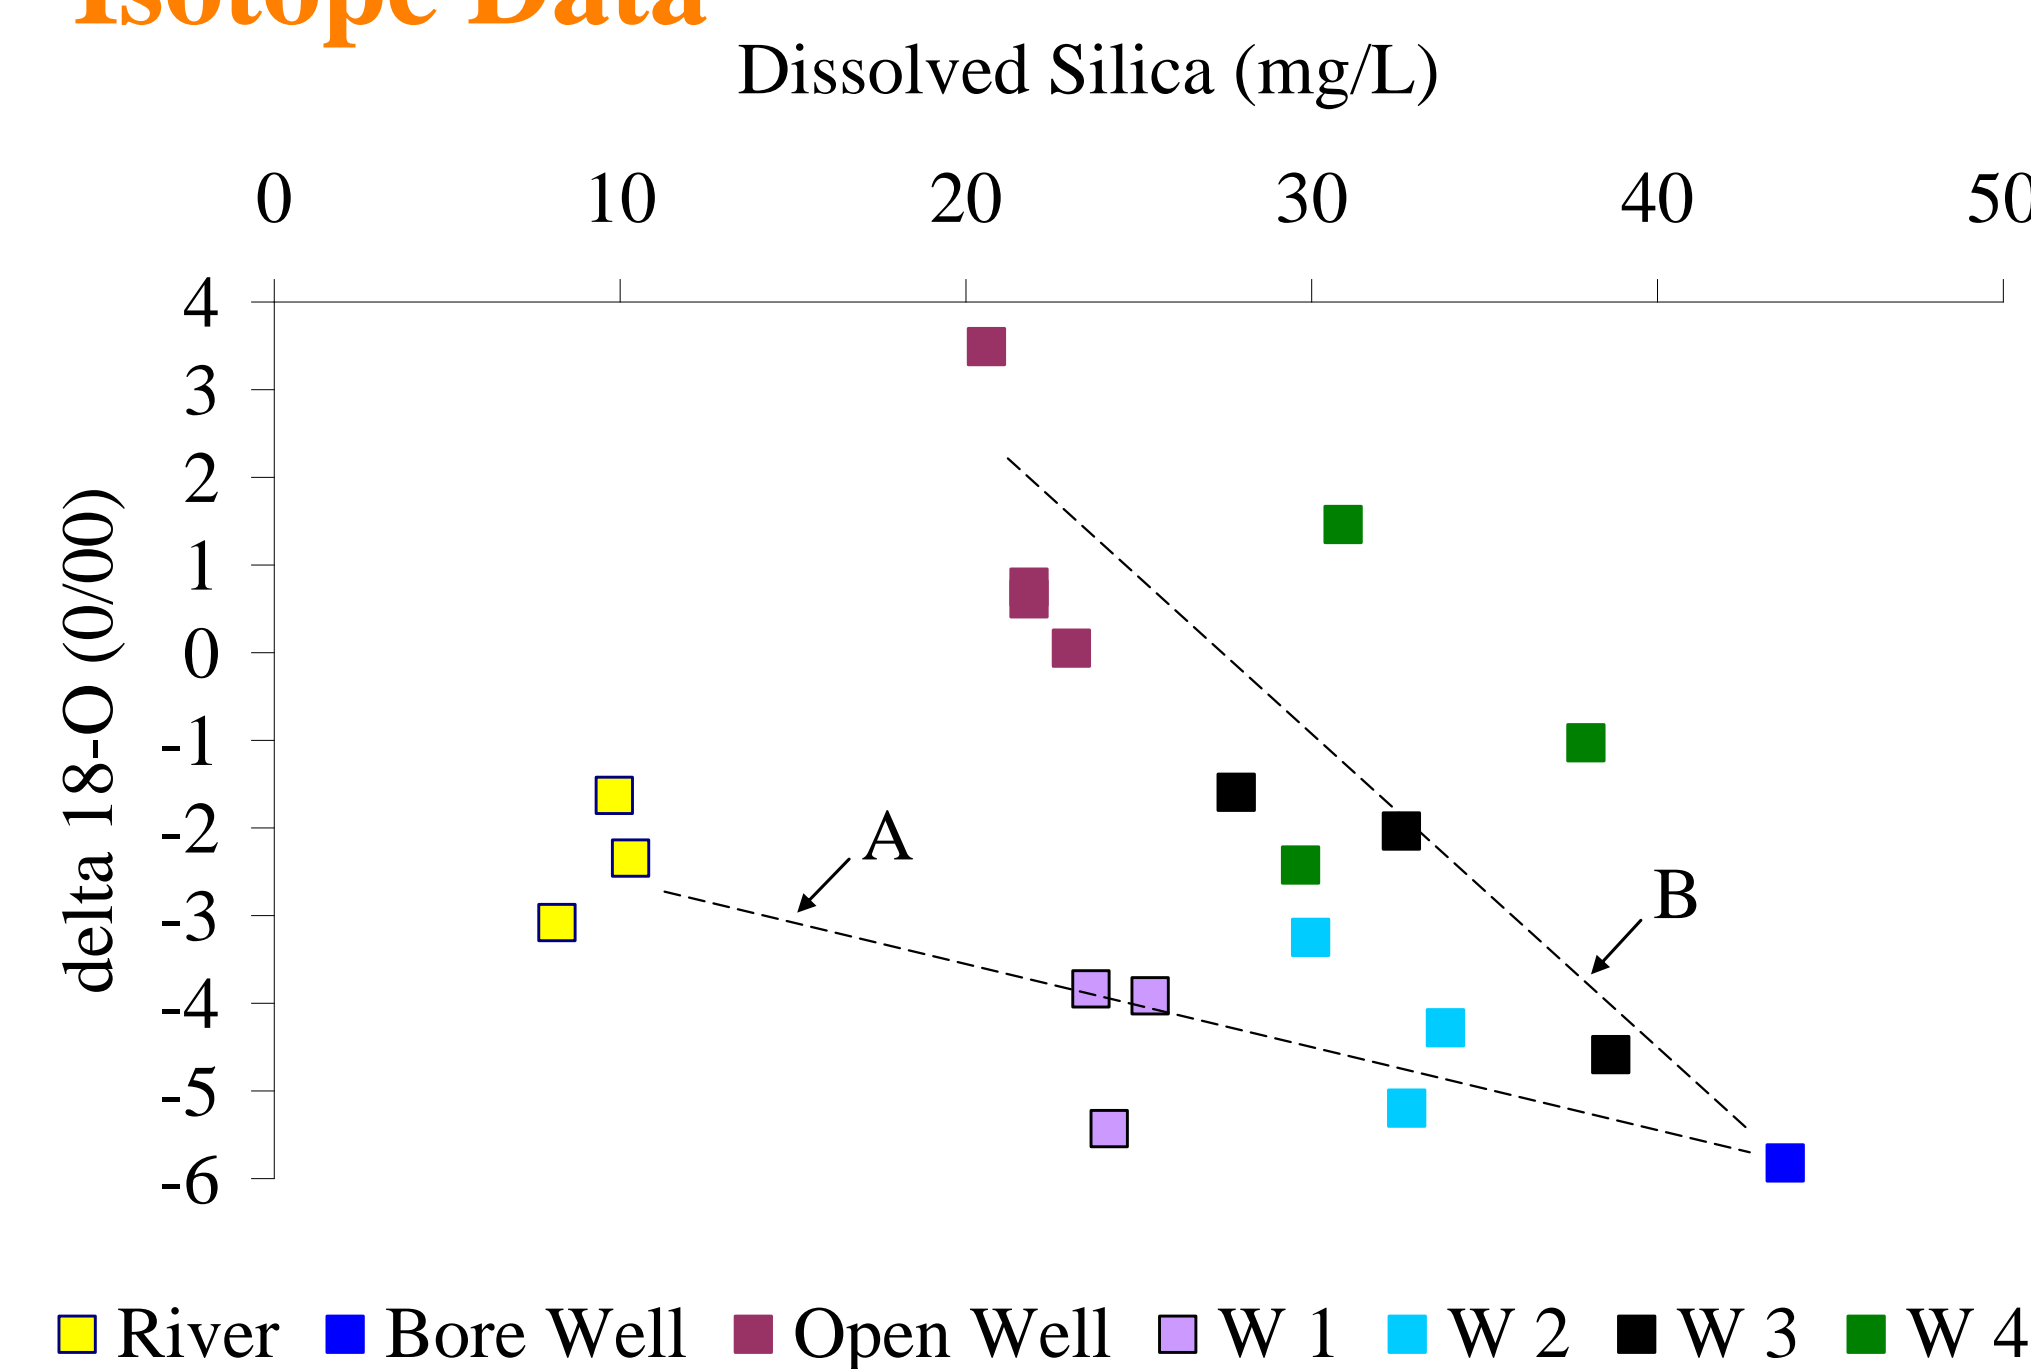


Figure 2. Mixing line A shows Wells 1 and 2 falling between river water and groundwater (Bore Well). Mixing line B shows evaporative effect of rice paddies on Open Well and Wells 3 and 4.

## Dissolved Silica Data

Water Source	Average Percent Kali River water
Kali River at Kariyampalli (KKR)	100.0%
RBF Well 1	61.8%
RBF Well 2	45.9%
RBF Well 3	27.6%
RBF Well 4	50.7%
Kariyampalli Open Well (KOW)	57.8%
Mainal Bore Well	0.0%

Table 1: Dissolved silica concentrations show water from RBF Well 3 to have a mixture of approximately ¼ groundwater and ¾ Kali River water.

## Metals Data

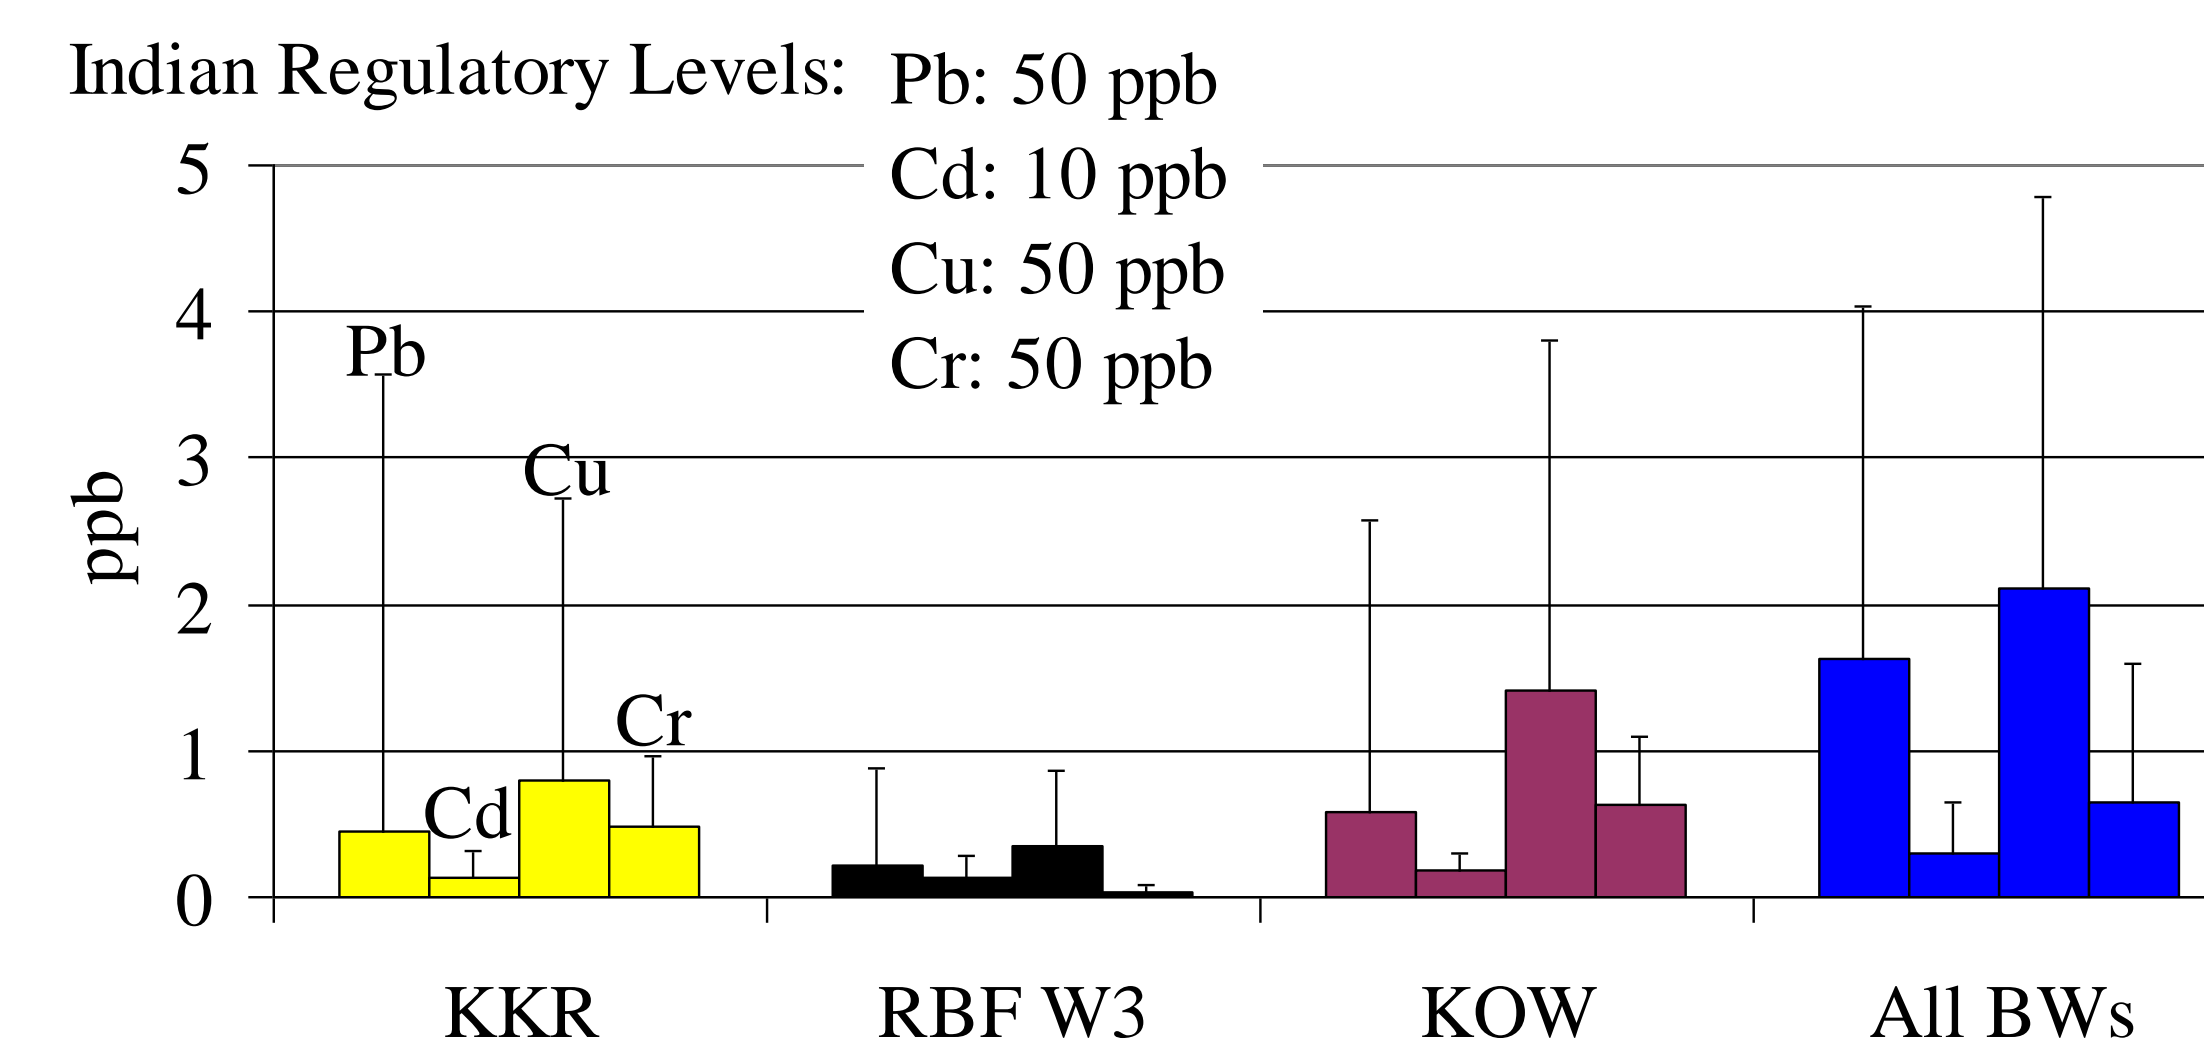


Figure 4. RBF water has lower average metals levels than other local drinking water options. Error bars show maximum ranges.

## Bacteria Data

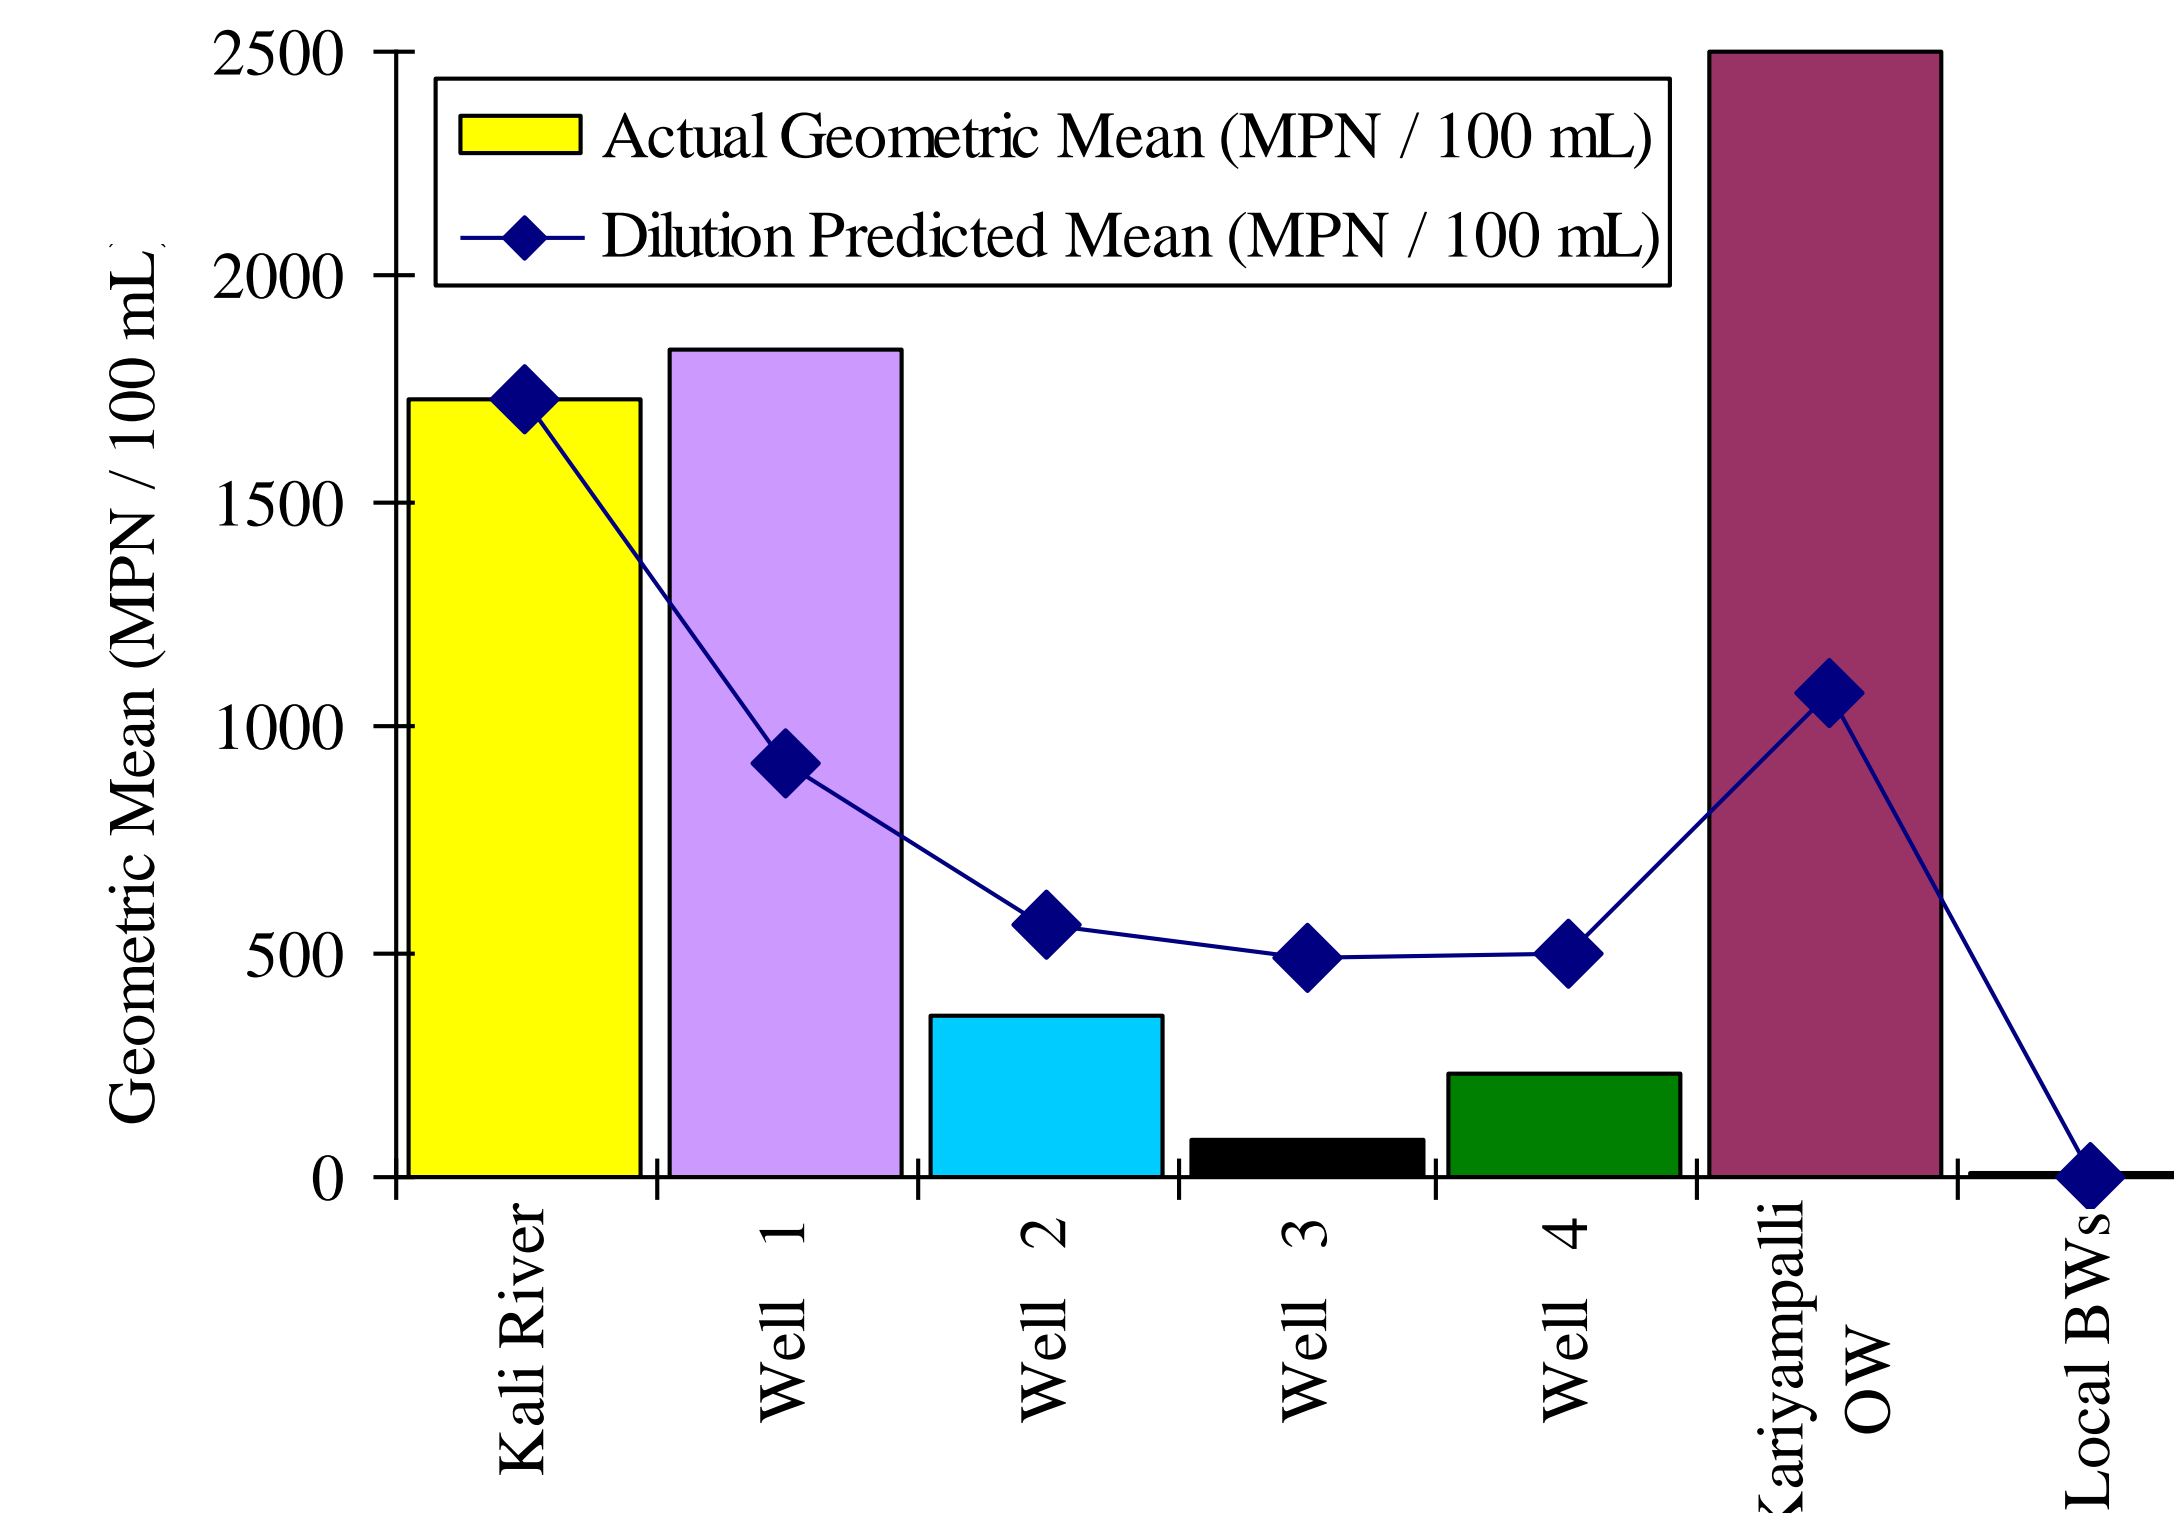


Figure 5: Total Coliform bacteria show an average reduction of 95.1% (geometric mean) with a maximum removal rate of 99.8 % from the river to the pumping well (Well 3). Dilution levels calculated with dissolved silica data are shown as predicted values (diamonds). Detection limits of IDEXX system are minimum: <1 MPN / 100 mL and maximum: >2,419.6 MPN / 100 mL.

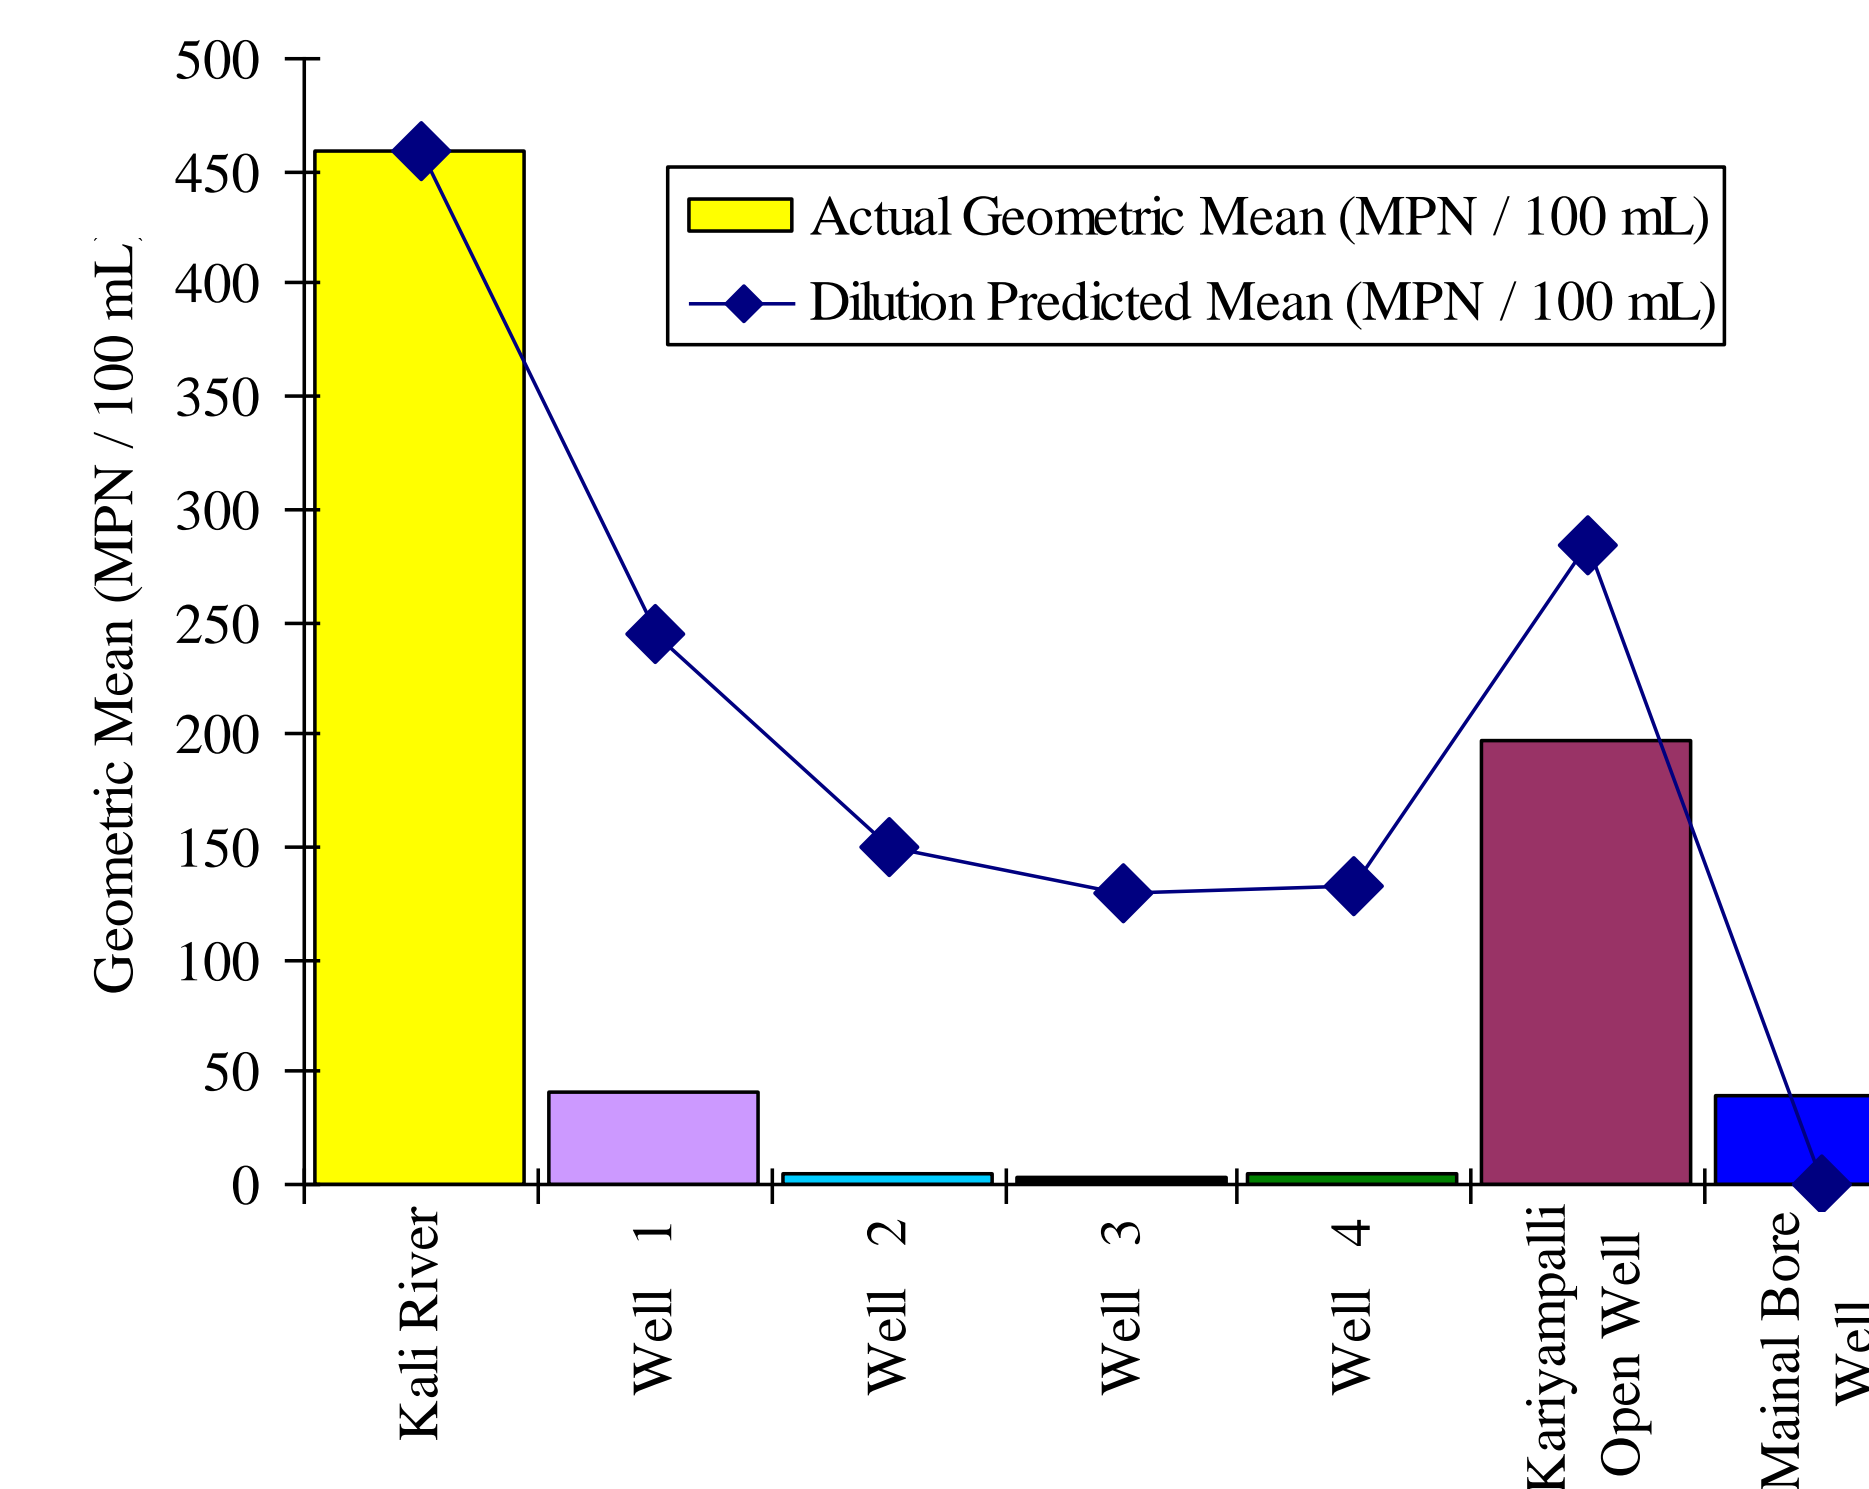


Figure 6. *E. coli* bacteria show an average reduction of 99.2% (geometric mean) and a maximum removal rate of 99.9% from the river to the production well (Well 3). Dilution levels calculated with dissolved silica data are shown as predicted values (diamonds).

## Discussion

The silica mixing model uses the Kali River and local groundwater from the Bore Well as end members to calculate average percentage of surface water and groundwater in the RBF wells. This model shows an average of 27.6% river water in the production well, RBF Well 3. Although other wells in the RBF well field show a change in silica concentration with time, Well 3 shows a constant percentage of groundwater in samples taken before and after 11 months of regular pumping. Isotopic data

suggest that irrigation with river water on the rice paddies as well as evaporation at the same rice paddies near the research site are affecting Wells 3 and 4. When considering both metals and bacteria pollutant levels, the pumping well produces safer water than any other drinking water source in the area.

## Conclusions

- Isotopes: Wells 1 & 2 are similar to Kali River  
Wells 3 & 4 are influenced by nearby irrigation and evaporation
- Silica: Well 3 is an average of 27.6% river water
- Metals: Well 3 versus dilution predicted mixture:  
Lead: 82.4% improvement  
Cadmium: 46.7% improvement  
Copper: 80.2% improvement  
Chromium: 93.7% improvement
- Bacteria: Total Coliform: ≥ 95.1% average removal  
*E. coli*: 99.2% average removal
- Groundwater dilution by itself does not explain metals and pathogen removal
- RBF water is safer than other drinking water sources in the area, while also reducing groundwater drawdown

## References

- Boving et al., 2010, Riverbank filtration for protection of Jordanian surface water and groundwater – Draft Final Report: NATO, Report 981454, p i – 53.
- Hooper, R., and Shoemaker, C., 1986, A comparison of chemical and isotopic hydrograph separation: Water Resources Research, v. 22, no. 10, p. 11.
- Kim et al., 2003, Effect of dissolved organic matter and bacteria on contaminant transport in riverbank filtration: Journal of Contaminant Hydrology, v. 66, p. 1-23.
- Maps.google.com
- Rodell, M., Velicogna, I., and Famiglietti, J.S., 2009, Satellite-based estimates of groundwater depletion in India: Nature 460, p. 999-1002.
- Schmidt et al., 2003, Experiences with riverbank filtration and infiltration in Germany: DVGW Water Technology Center, p. 17.
- Sklash, M., and Farvolden, R., 1979, The role of groundwater in storm runoff: Journal of Hydrology, v. 43, p. 21.

## Acknowledgments

Thank you to Anne Veeger and Vinka Craver for advice and guidance, Prasanna Namannavar and Ataur Rehman Khazi for field support, Heather Cook for laboratory assistance, and the World Bank's Development Marketplace Program for funding.

THINK BIG  
WE DO™



The World Bank






teri

The Energy and Resources Institute

# Performance of Riverbank Filtration in India

Centre for Environmental Studies & Research P.O. Box 17, Sultan Qaboos Univeristy, Al-Khod, PC 123 Sultanate of Oman

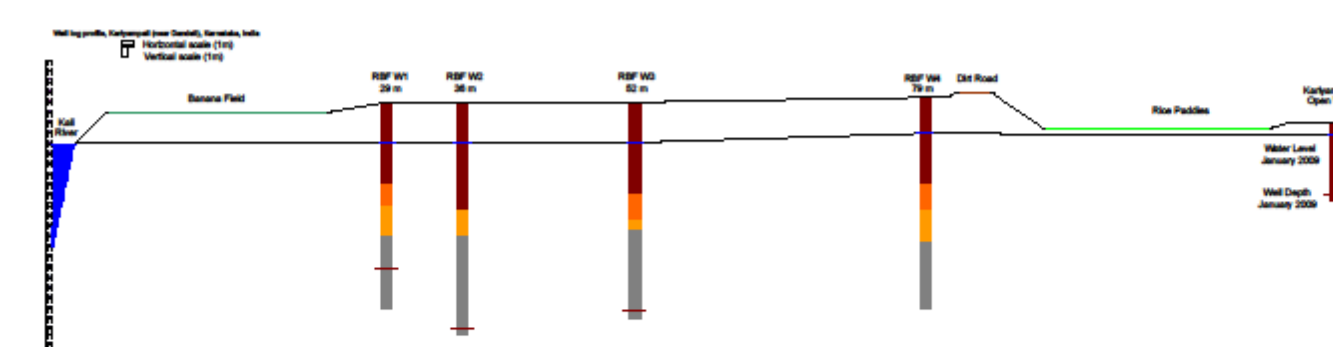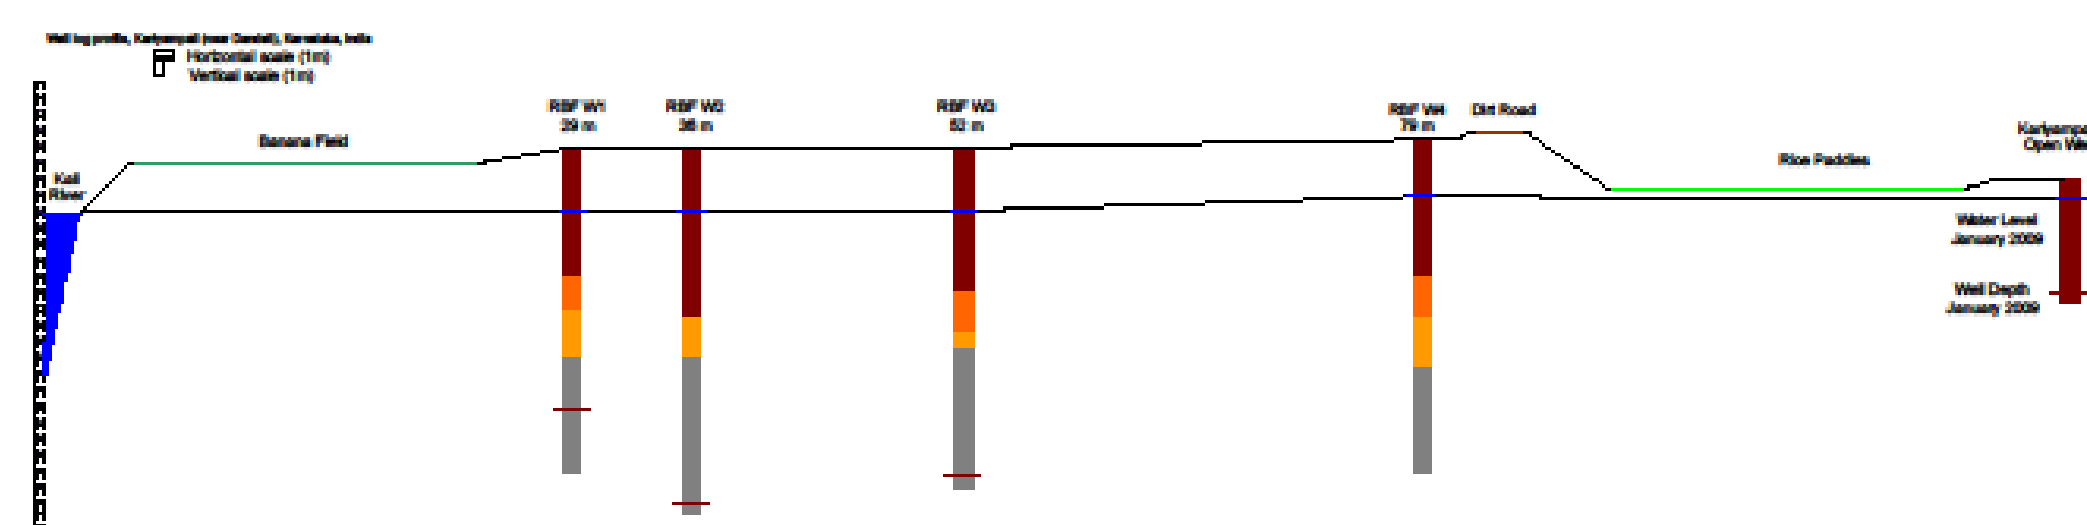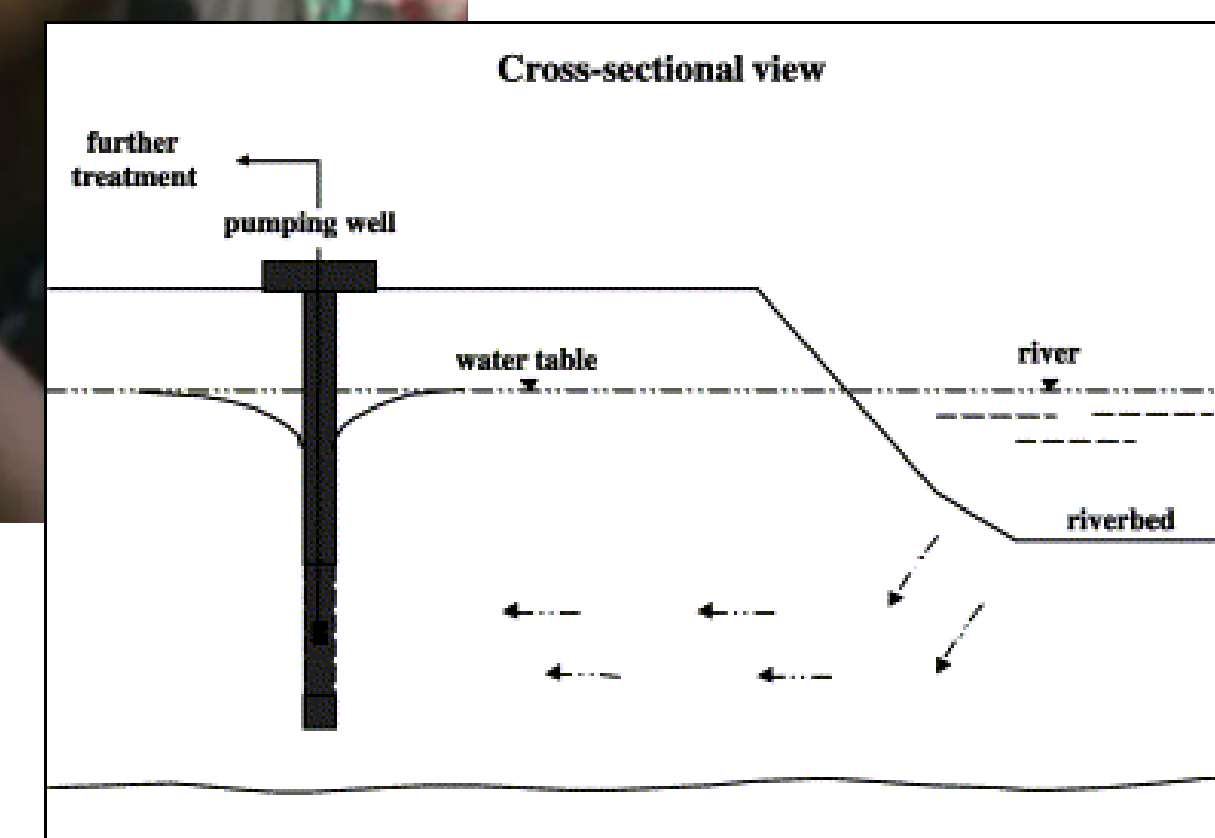


## Contact Information

Pamela Cady  
 Dept of Geosciences - College of the Environment and Life Sciences  
 University of Rhode Island Kingston, RI 02881  
 phone: 401-440-4423 email: pamelacady@gmail.com

## Riverbank Filtration (RBF)

In Riverbank Filtration a shallow well is drilled near a surface water source to improve the water quality by drawing river water through the aquifer material.

Figure 1: Riverbank Filtration (RBF) system diagram: cross-sectional view shows path of infiltrating river water to the production well (Kim et al., 2003)

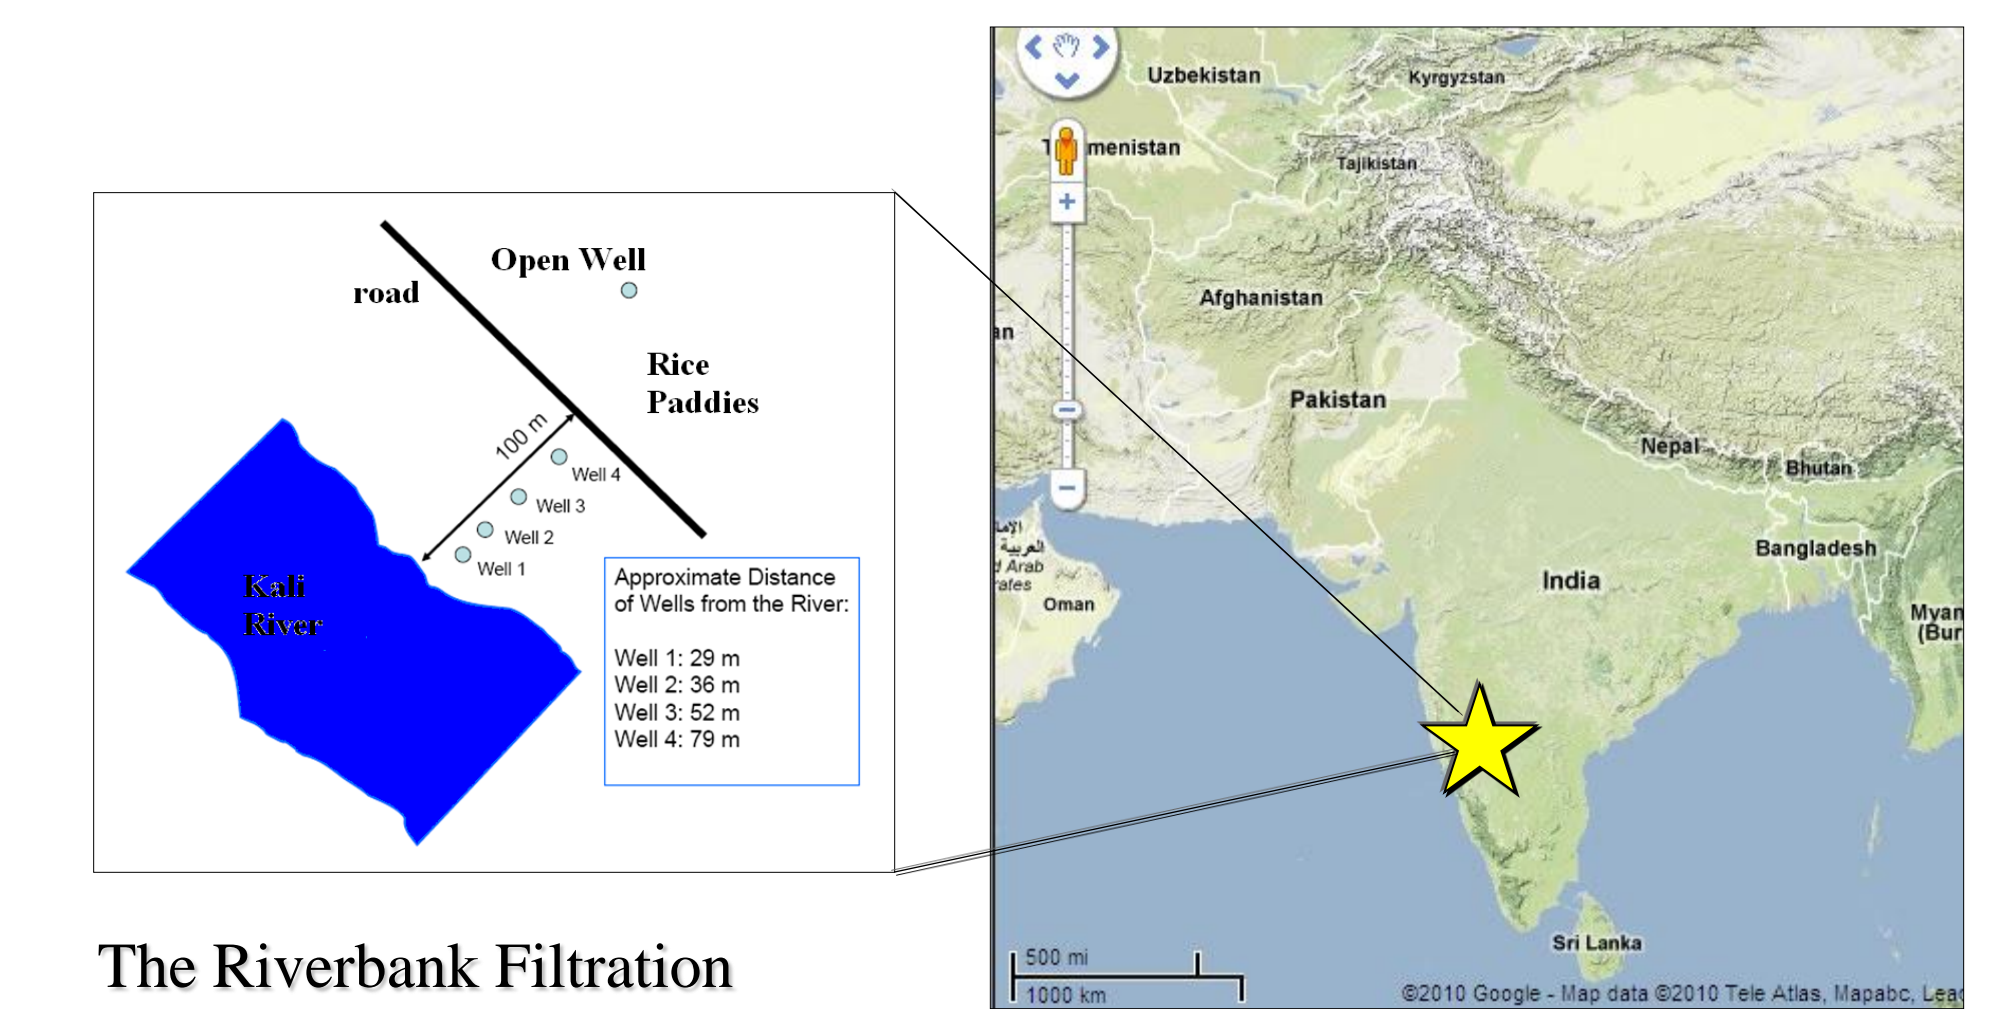

The Riverbank Filtration research site is located in India's Western Ghats

Source: maps.google.com

## Materials and Methods

- Stable isotopes: isotope-ratio mass spectrometer
- Dissolved silica: UV-vis spectrophotometer
- Metals: Inductively Coupled Plasma Mass Spectrometer (ICPMS)
- Bacteria: IDEXX Most Probable Number (MPN) enumeration technique

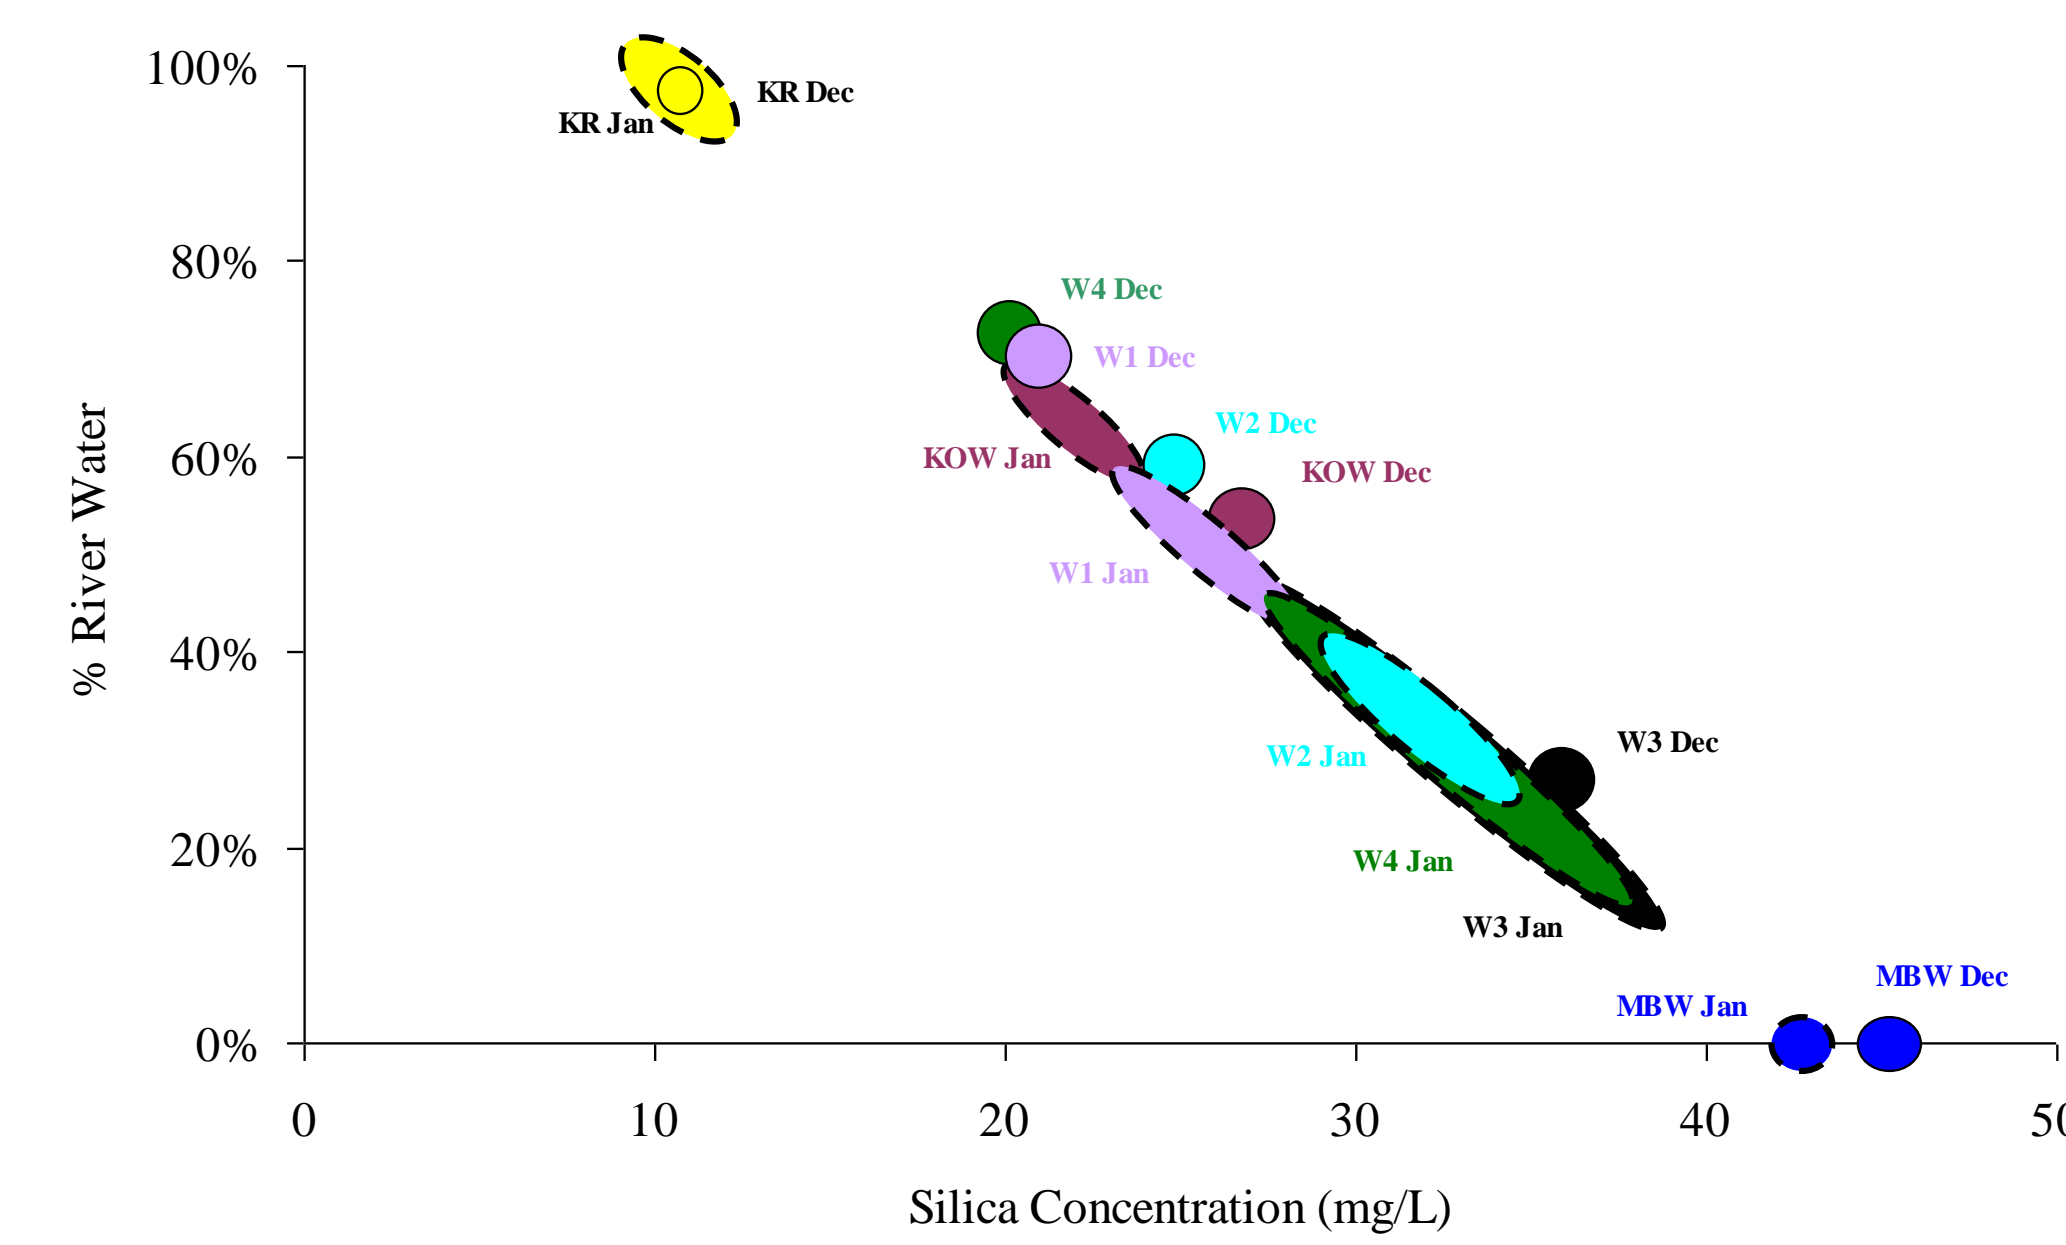


Figure 3. Silica concentration demonstrates percentage of Kali River water drawn into RBF wells 1, 2 and 4 increases with time pumping. Closed lines represent samples taken 11 months after those with dashed lines.